


# LED Lighting

INFINO diffusion PC and Thermally Conductive Polymer  
Bringing the sustainable solution

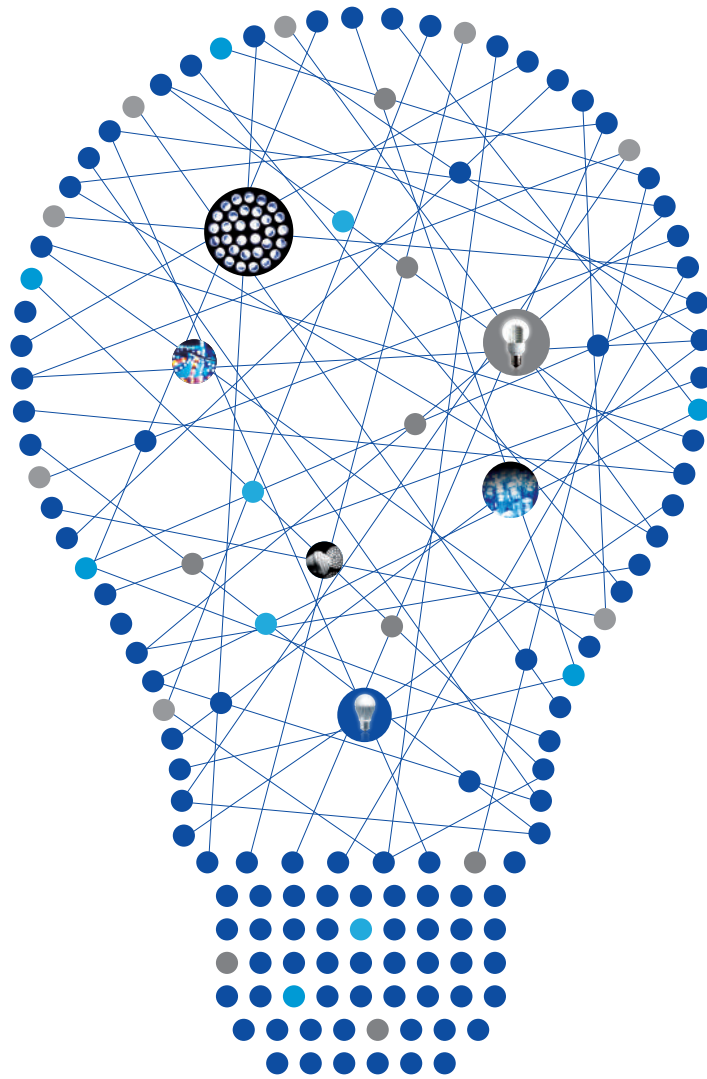

# SAMSUNG SDI

Drive continuous  
growth in high-value  
products and a stronger  
customer focus.



CHEMICAL

Samsung SDI is aiming to provide values for customer growth and success through innovation and efficiency. We will strengthen our global competitive edge by developing high-end, differentiated products, strengthening product portfolios, and building foundations for global business.

## Contents

---

- 02 LED Lighting solution
- 03 Diffusion *INFINO* PC for lens cover
- 07 Thermally Conductive Polymer for heat sink
- 10 Global Network



# LED LIGHTING SOLUTION

## LED market overview and requirements

LED, widely viewed as the next-generation lighting source, has a high level of power saving and can be used for classy light settings, which tends to accelerate demand. Developing new materials customized for LED is now in order.


- Requirements for LED lighting material
  - Better energy efficiency through the prevention of electricity loss
  - Eco-friendly feature to meet the global environment regulations
  - Economic benefit through lightweight
- Samsung SDI offers optimal material that takes the lead in the LED lighting market and is also engineered to meet the market requirements.

To ride the dramatically growing LED lighting market, Samsung SDI has developed diffusion PC with excellent optical properties and thermally conductive material with high heat resistance and weatherability that could replace aluminum.

## Product Portfolio for LED lighting

Samsung SDI has developed the double co-extrusion L-Tube, marking the first-ever product in the world. As such, the company offers the market-leading technical solutions.

- Applications : Flat panel type, bulb type, street lamp, fish lamp, factory lamp

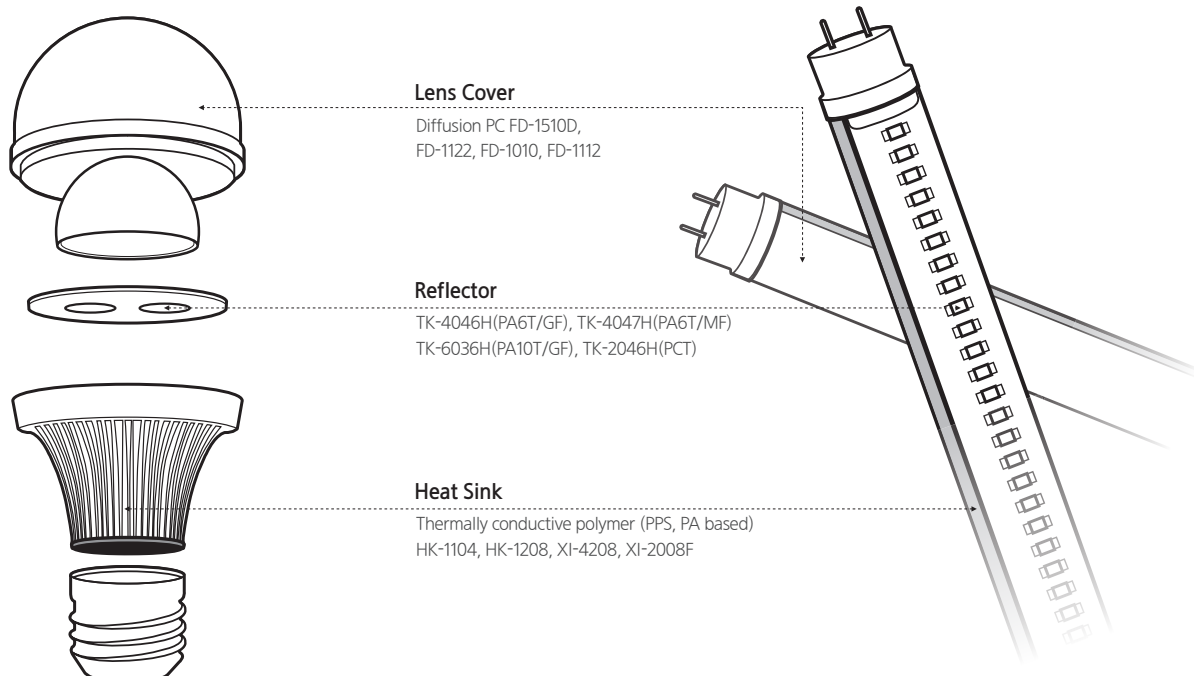

# DIFFUSION *INFINO* PC FOR LENS COVER




*INFINO* diffusion PC, developed through the combination of Samsung SDI's high-quality PC and excellent particles, has a full line-up of products with diverse diffusion/transmittance rates for different purposes.

## Key Features

- **Superior optical properties**
  - Superior transparency
  - High degree of diffusion
- **Eco-friendly flame retardancy**
  - 1.2mm V0 Non-Halogen
  - Comply with Global safety regulations: non bromine, non phosphate
- **High efficiency of productivity**
- **Potentially system cost reduction**
- **Excellent injection molding process : minimize gate marks**
- **Excellent durability**
  - Excellent light resistance with low yellow index under UV exposure
  - Even if exposed to UV for a long period of time, there are few yellowing cases
  - High pyrolysis temperature

## Product Guide

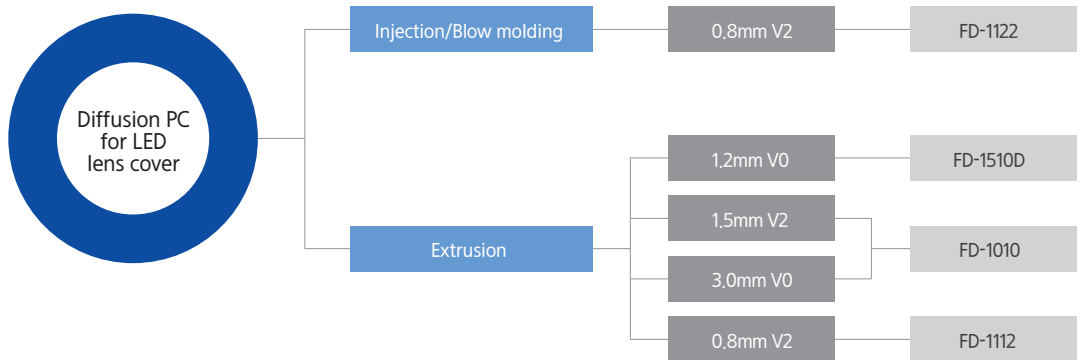


# DIFFUSION *INFINO* PC FOR LENS COVER




## Benefits of Diffusion *INFINO* PC


- Transparent flame retardant PC
  - World best transparent FR PC : non-phosgene green technology process
  - Eco-friendly flame retardancy : non-halogen system, excellent flame resistance upto 1.2mm V0
- Tailored optical characteristics
  - Synthesis of featured light diffusers
  - Optimization of transmittance (TT) and degree of light dispersion(DD)
- Light diffusion flame retardant

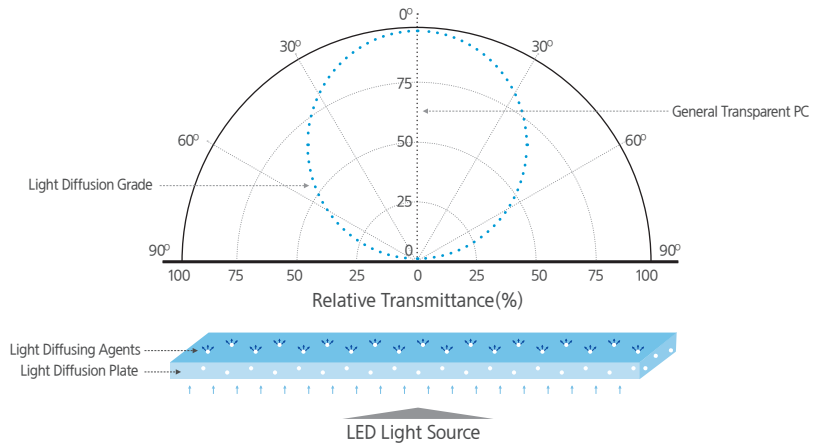

- Superior optical properties : High transmittance and degree of diffusion

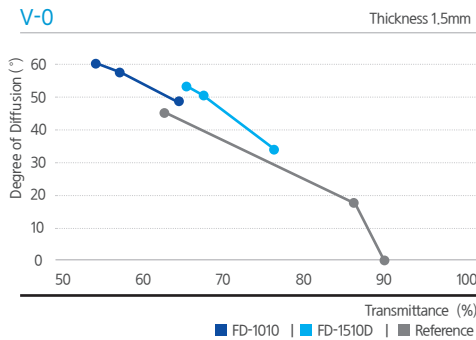

Grade	High DD	High TT
FD-1510D	LDW315	LDW319
FD-1010	LDW265	LDW318

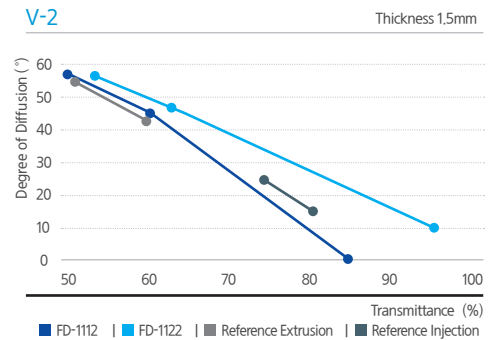


Grade	High DD	High TT
FD-1112	LDW238	LDW213
FD-1122	LDW320	LDW309

# DIFFUSION *INFINO* PC FOR LENS COVER




- Excellent UV stability and thermal stability

UV Stability (24hrs)  
V-0

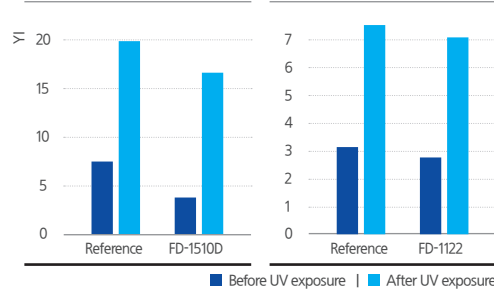


Thermal Stability

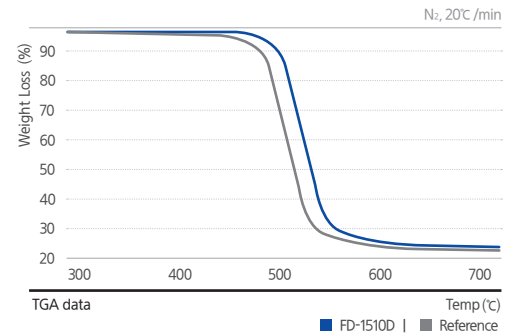


- *INFINO* FD-1122 transmittance levels remain at an excellent level before and after UV exposure



Before UV exposure

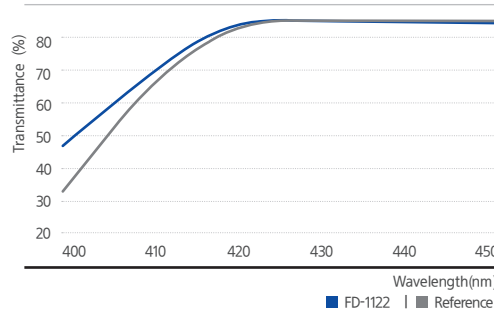



After UV exposure

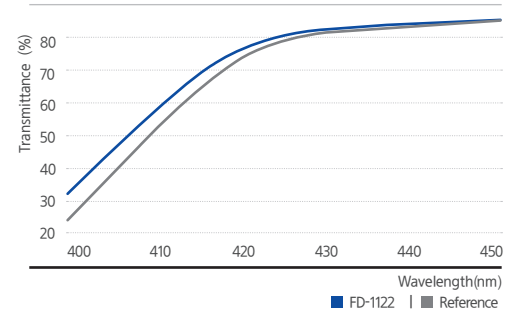

- Enlarged back light distribution and wider diffusion angle

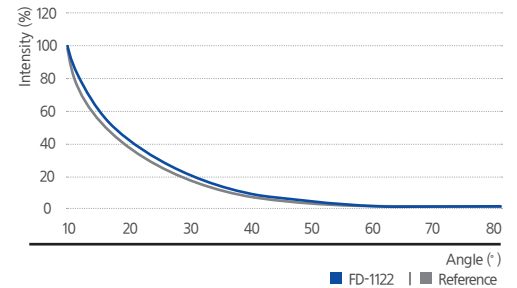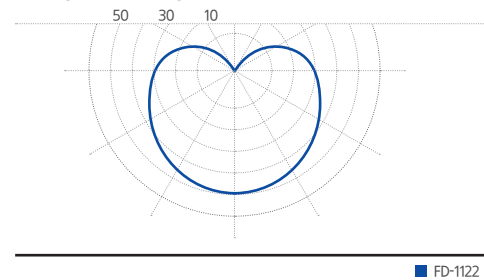

- Dispersion map based on thickness : Dispersion pattern is large and even

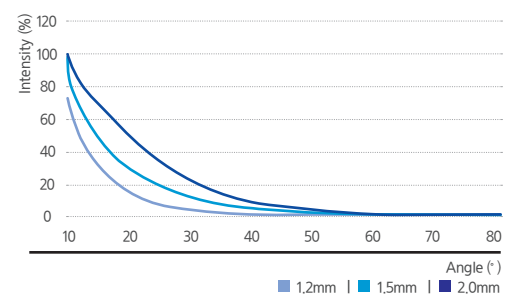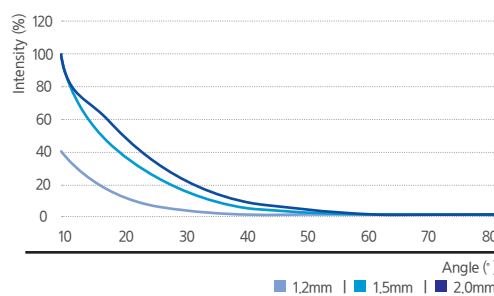

# DIFFUSION *INFINO* PC FOR LENS COVER



## Technical Data

Properties	Test Method	Condition	Unit	FD-1510D	FD-1122	FD-1010	FD-1112
<b>Physical Properties</b>							
Specific Gravity	ASTM D792	Natural color	-	1.2	1.2	1.2	1.2
Melt Flow Index	ASTM D1238	250°C/10kg	g/10min	13	35	16	13
<b>Mechanical Properties</b>							
Tensile Strength	ASTM D638	50mm/min	kgf/cm <sup>2</sup>	650	650	650	630
Flexural Strength	ASTM D890	2.8mm/min	kgf/cm <sup>2</sup>	960	950	960	930
Flexural Modulus				23,000	23,000	23,000	21,000
Izod Impact Strength	ASTM D256	1.8" 23°C	kgf cm/cm <sup>2</sup>	12	10	12	10
<b>Thermal Properties</b>							
Vicat Softening Temp	ISO R 306 B50	5kg, 50°C/hr	°C	144	141	144	145
<b>Flame Characteristics</b>							
Flammability	UL94	Thickness	-	1.2mm V0	0.8mm V2	3.0mm V0 1.5mm V2	0.8mm V2

## Processing Guide


### • Injection Molding

Item	Condition	
Pre-drying	4hrs 100°C	
Cylinder Temperature	1(Hopper side)	250 ~ 260°C
	2	260 ~ 270°C
	3	270 ~ 280°C
	4(Nozzle side)	280 ~ 290°C
Nozzle Temperature	290 ~ 300°C	
Mold Temperature	70 ~ 90°C	
Injection Speed	Middle	
Injection Pressure	700 ~ 1500 kgf/cm <sup>2</sup>	
Screw Rotation Speed	20 ~ 50 rpm	

### • Profile Extrusion

Item	Condition	
Drying Temperature	100°C	
Drying Time	4 hrs	
Misture Content	0 ~ 0.02%	
Melt Temperature	225 ~ 270°C	
Barrel Temperature	Zone 1	215 ~ 250°C
	Zone 2	225 ~ 260°C
	Zone 3	225 ~ 270°C
	Zone 4	235 ~ 280°C
Adapter Temperature	240 ~ 290°C	
Die Temperature	240 ~ 290°C	

# THERMALLY CONDUCTIVE POLYMER FOR HEAT SINK




*INFINO* thermally conductive polymer, armed with eco-friendly flame retardancy and high heat resistance for optimal LED efficiency, is an ideal material for LED heat sink.


## Key Features

- Eco-friendly flame retardancy
  - V-0, Non Halogen
  - Meets global safety regulation
- Color solution : white-colored grade development
- Provides color solution : development of a grade that can handle white color
- High pyrolysis temperature : efficient thermal conductivity
- Economic benefit with weight and cost reduction

## Product Guide

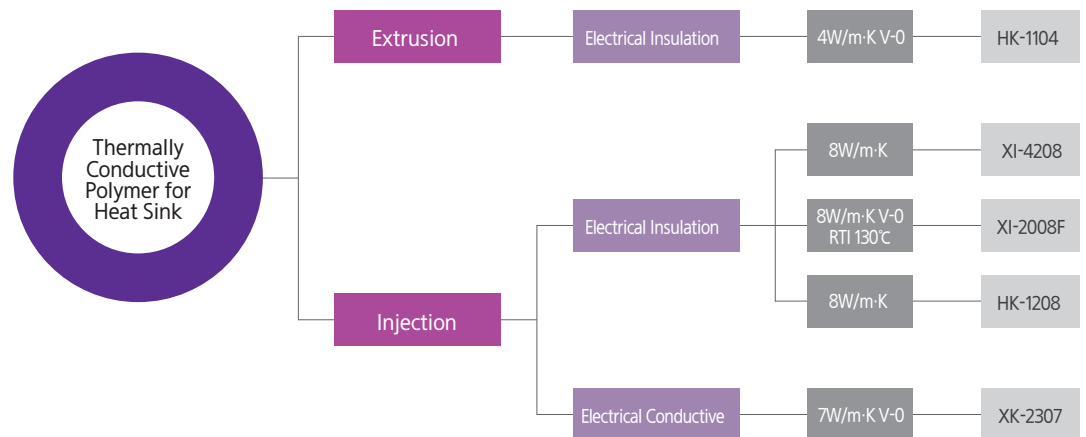


The polymer's inherent advantage, excellent processability and high thermal conductivity makes for an ideal protection solution against heat.

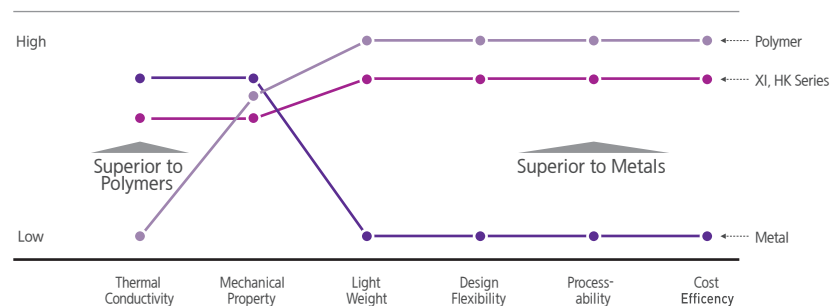




# THERMALLY CONDUCTIVE POLYMER FOR HEAT SINK



To provide the optimal metal replacement, simulations are conducted to analyze thermal conduction effects and structural properties in an effort to help design the structure.

## Technical Solution

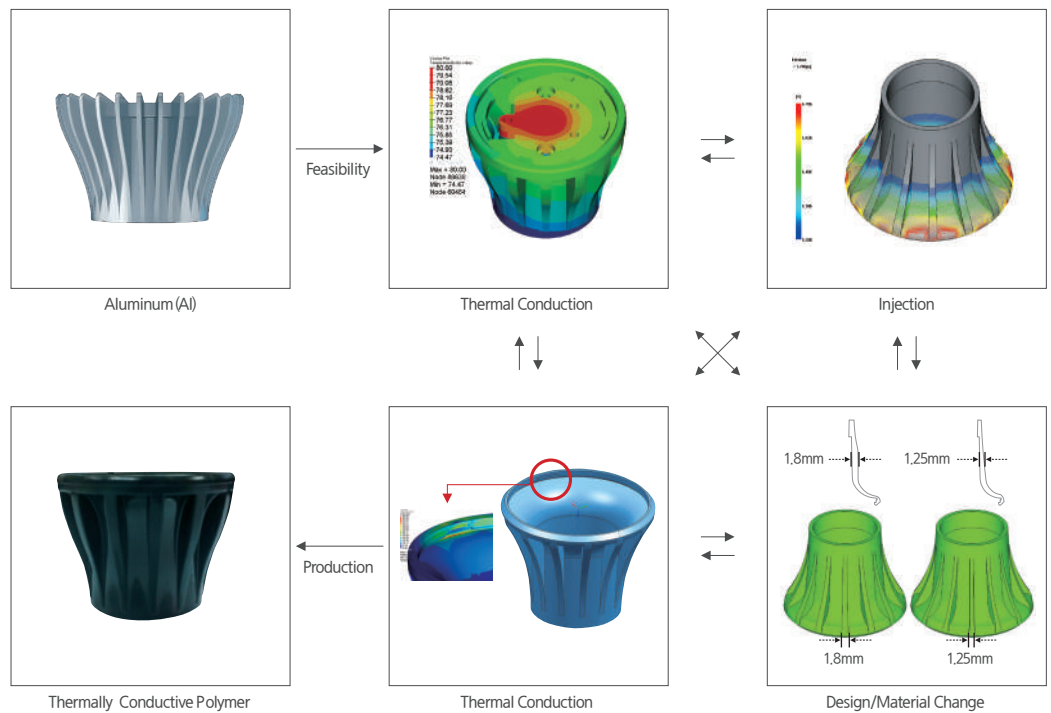


## Innovative Technology

### Samsung SDI's world's first double L-Tube co-extrusion

For the existing tube-type lighting, thermally conductive polymer and diffusion PC parts were separately assembled. In contrast, Samsung's new product adopts co-extrusion method, which gets rid of the assembly process in a way that secures innovative productivity level for the L-Tube.

- Co Extrusion with Light Diffusion PC

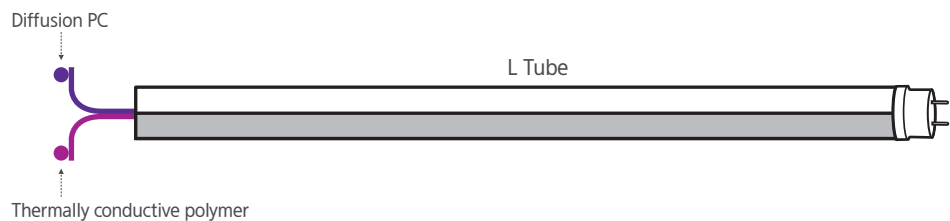

# THERMALLY CONDUCTIVE POLYMER FOR HEAT SINK



## Technical Data


Properties	Test Method	Unit	HK-1104	HK-1208	XI-4208	XI-2008F	XK-2307
Thermal Conductivity	Cheil Method	W/m-K	4	8	8	8	7
Electrical Resistivity	ASTM D257	$\Omega$ -cm	$10^{12}$ ↑	$10^{12}$ ↑	$10^{12}$ ↑	$10^{12}$ ↑	$10^3$
Izod Impact	ASTM D 256A	KJ/M <sup>2</sup>	15	8	4.0	2.0	4.6
Un-Notched			-	-	22.0	4.4	15.5
Tensile Elongation	ASTM D 638	%	10.0	6.0	2.2	2.0	1.2
Tensile Strength		MPa	37	25	60	30	90
Flexural Modulus	ASTM D 790	gpa	3	5	6	11	18
Flexural Strength		MPa	70	50	100	60	120
Heat Distortion Temperature	ASTM D 648	°C	>130	>130	>240	>270	>270
Mold Shrinkage (MD)	ASTM D 955	%	0.2	0.1	0.3	0.2	0.3
Mold Shrinkage (TD)			0.4	0.3	0.4	0.3	0.6
Specific Gravity	ASTM D792		1.62	1.95	1.8	2.20	1.71

## Processing Guide

Item	Injection			Profile	
	XI-4208	XI-2008, XK-2307	HK-1208	HK-1104	
Pre-drying	4hrs 100°C	2hrs 130°C	4hrs 100°C	4hrs 100°C	
Cylinder Temperature	1 (Hopper side)	290 ~ 300°C	260°C	300°C	215 ~ 250°C
	2	300°C	290°C	320°C	225 ~ 250°C
	3	310°C	305°C	330°C	225 ~ 260°C
	4 (Nozzle side)	320°C	315°C	330°C	235 ~ 270°C
Nozzle Temperature	310 ~ 320°C	310°C	330°C	235 ~ 280°C	
Mold Temperature	130 ~ 150°C	110 ~ 130°C	110 ~ 130°C	240 ~ 290°C *	
Injection Speed	Middle to high	Middle to high	Middle	-	
Injection Pressure	30 ~ 100 MPa	40 ~ 90 MPa	10 ~ 50 MPa	-	
Screw Rotation Speed	50 ~ 100 rpm	50 ~ 100 rpm	50 ~ 100 rpm	-	

\* Adapter temperature / Die temperature

# GLOBAL NETWORK

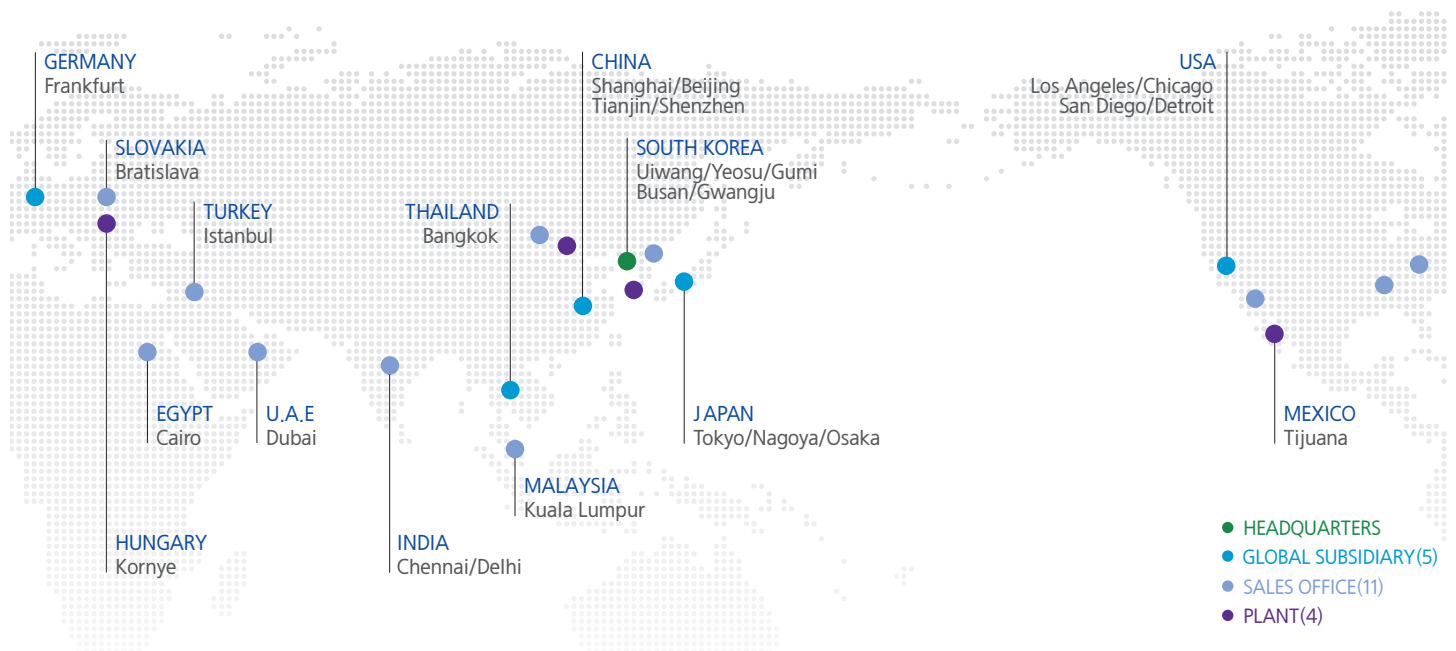

## HEADQUARTERS

Samsung SDI Co., Ltd.  
332-2 Gocheon-dong Uiwang-si  
Gyeonggi-do, 437-711, Korea

Tel : +82-31-596-3408  
Fax : +82-31-596-4134  
E-mail : chemical@samsung.com

## GLOBAL SUBSIDIARY

Los Angeles, USA  
Samsung Chemical Inc.  
Tel : +1-562-229-1307  
E-mail : james.ham@samsung.com

Frankfurt, Germany  
Samsung Chemical Europe GmbH  
Tel : +49-6196-66-7490  
E-mail : jason.chung@samsung.com

Shanghai, China  
Samsung Chemical Material Trading  
[Shanghai] Co., Ltd.  
Tel : +86-21-6270-3000[325]  
E-mail : yingshun.lee@samsung.com

Bangkok, Thailand  
Samsung Chemical Thailand  
Tel : +66-2-624-6715  
E-mail : atcharaporn.p@samsung.com

Tokyo, Japan  
Samsung Chemical Inc.  
Tel : +81-3-6234-2197  
E-mail : c77.song@samsung.com

## SALES / SERVICE OFFICE

**ASIA**  
Shenzhen, China  
Tel : +86-755-2399-7310  
E-mail : harry.jin@samsung.com

Tianjin, China  
Tel : +86-22-2836-4261  
E-mail : zhengdao.lee@samsung.com

Nagoya  
Tel : +81-52-569-1807  
E-mail : boin56.noh@samsung.com

Osaka, Japan  
Tel : +81-6-6949-3162  
E-mail : f.naoki@samsung.com

Kuala Lumpur, Malaysia  
Tel : +60-3-2174-4534, 4570  
E-mail : jeffrey.kang@samsung.com

Chennai, India  
Tel : +91-98401-04251  
E-mail : deepak.lee@samsung.com

Delhi, India  
Tel : +91-81302-19193  
E-mail : yogendra.kang@samsung.com

Dubai, U.A.E  
Tel : +971-4-447-3411  
E-mail : moon357@samsung.com

**AMERICA**  
Chicago, U.S.A.  
Tel : +1-847-407-2845  
E-mail : jerry.tennant@samsung.com

San Diego, U.S.A.  
Tel : +1-619-278-0961  
E-mail : jongho82.yang@samsung.com

Detroit, U.S.A.  
Tel : +1-248-276-8484  
E-mail : brian.grosser@samsung.com

**EUROPE**  
Bratislava, Slovakia  
Tel : +421-90-170-2001  
E-mail : jh2407.kim@samsung.com

Istanbul, Turkey  
Tel : +90-541-231-0314  
E-mail : ferhat.gungor@samsung.com

## PLANT

Yeosu, Republic of Korea  
Tel : +82-61-689-1221  
E-mail : heuicheol.lee@samsung.com

Tianjin, China  
Tel : +86-22-5868-0291  
E-mail : mc007.jeon@samsung.com

Kornye, Hungary  
Tel : +36-34-814-120  
E-mail : bt.hyun@samsung.com

Tijuana, Mexico  
Tel : +52-664-627-4947  
E-mail : psy13560@samsung.com

***INFINO***<sup>®</sup>

[www.samsungchemical.com](http://www.samsungchemical.com)

NOTE : The information contained herein is provided by Samsung SDI Co., Ltd. and its subsidiaries and affiliates (collectively referred to as "SAMSUNG") for information purposes only and should be used by individuals with technical experience and knowledge in the area. Samsung SDI does not make any representation or warranties of the usefulness or expected result of the information, and does not assume any responsibility whatsoever related to the use of the information. SDI-C-A-072012